


# Winston TRAILERS

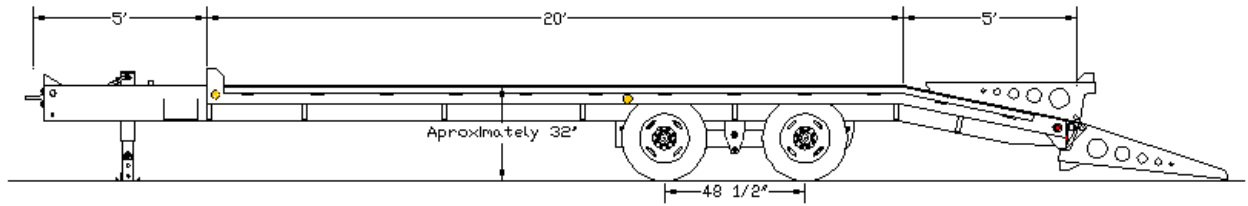

**Specifications:** WTM, Inc. Model: AP22025AL 10 Ton ProSeries Low Profile Dual Tandem

## Dimensions:

Std. Deck Length: 20' Flat + 5' Dovetail

Width: 96" Wide, 102" Optional

Deck Height: Low Profile, (approximate loaded): 32"

Tongue Length: Cold Formed 5' (No Cutting or Notching)

Ramps: 20" wide, 5' Long, Lie Flat, Double Hinged Spring Assist

Weight: 5980 lb.

\*GVWR: 25,980 lb.

## Construction:

Pierce Unitized Low Profile Design

Main Frame: 12" @ 16 lb. Grade 50 One Piece Beam, Low Profile CNC Plasma Pierced

Cross Members: 3" Formed channel on 16" Centers or as close as axles allow

Bracing: Cross Frame Reinforcement with Suspension Manufacturer's Recommended Hanger Bracing

Siderails: 6" Channel @ 8.2 lb.

Ramps: Custom Designed, All in One, Lie Flat, Double Hinged Spring Assist, Adjustable 30 to 96"

## Undercarriage:

Axles: (2) 10,000 lb. Dexter Oil Bath

Brakes: Both Axles, Auto Adjusting 2S1M ABS Air, 12 1/4" x 4"

Springs: (4) 5,000 lb. HD 3" Wide Slipper, 5 Leaf with Rubber Bushing Eyes (No Grease Needed)

Suspension: 48.5" Wide Spread Equalizer, Adjustable, with Rubber Bushings (No Grease Needed)

Wheels: (8) 16x6" Dual, Hub Piloted, 8 Lug, Clamp Ring, Bud Type

Tires: (8) LT225/75R16 E Low Profile Radials

## Features:

Hitch: 5 Position, Adjustable 4 Bolt Lunette Eye, 2 1/2" ID, 5 Position with Grade 8 Bolts

Jack: 12,000 lb, Spring Assist Drop Leg

Lights: Premium DOT Sealed Beam Rubber Mounted

Harness: Premium Sealed Modular Harness

Breakaway: 12 Volt Battery w/Integrated Charger

Tiedowns: 24 Stake pockets with Rubrails

Flooring: 2x8" Southern Oak, Staggered Where Joined, with Large 5/16" Floor Screws

Paint: Primed and Painted Throughout with Rust Inhibitive Primer and Painted with Modified Urethane

Storage: Lockable Tool Box in Tongue.

Other Features Include: Step on Tongue, 6 pole Plug, Hi Tensile Safety Chains with Safety Hooks, Floor Plate over Tires for added Tire Clearance, Conspicuity Sheeting, Federal Inspection, One Year Warranty.

**Options:** 102" Wide, Extra Length, LED Lights, 2 5/16' Adjustable Gooseneck less Tongue Storage, Side Mounted Tool Box, Spare Tire Rim & Carrier, ABS Air Brakes, Spring Brakes on Air Brake, 4S/2M 4 wheel sensed ABS, Tire & Wheel Combos, Torflex Axles, Single 17.5" Tires, Elect. Winch on Headboard, 2 Speed Landing Leg. Dual 2 Speed Landing Gear, Self Cleaning Dovetail Inserts, Wood Filled Ramps, Paver Option Includes 6' Dovetail & 6' SA Wood Filled Ramps, Color per Quote

\*Maximum GVWR with Weight Distributed Evenly, Not to Exceed Ratings of Components. Recommended Tongue Weight at least 10%. Never Exceed Tow Vehicle's Towing or Load Specifications. Federal, State, and Local Restrictions may apply to Dimensions and Capacities. Specifications are subject to change without notice. This Trailer is Manufactured by WTM, Inc. 6116 Co. Rd. 28, Haleyville, AL 35565. 12-08